





# AN0531S02 ANTARIO

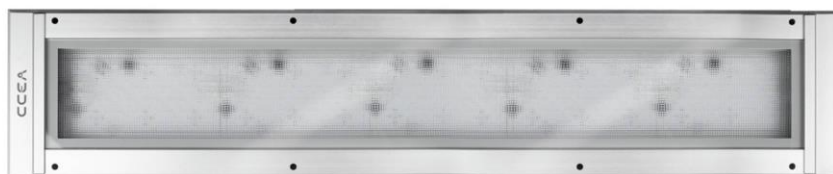

## PRODUCT FEATURES

<b>Power usage</b>	67 W
<b>Power supply</b>	24 Vdc
<b>Light source</b>	LED
<b>Electrical connection</b>	M12-A 4P Male
<b>Color temperature</b>	6500 K, CRI 80
<b>Luminous flux</b>	6150 lm
<b>Efficiency</b>	92 lm/W
<b>Light beam angle</b>	120°
<b>Housing</b>	Anodized aluminum
<b>Front protection</b>	Tempered glass
<b>Protection index</b>	IP67
<b>Impact resistance</b>	IK06
<b>Operating temperature</b>	-20 °C to + 45 °C (-04 °F to +113 °F)
<b>Weight</b>	3,30 kg (7,28 lb)
<b>Agency approvals</b>	CE, RoHS

## Mounting

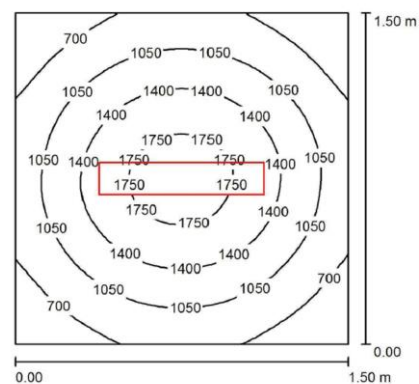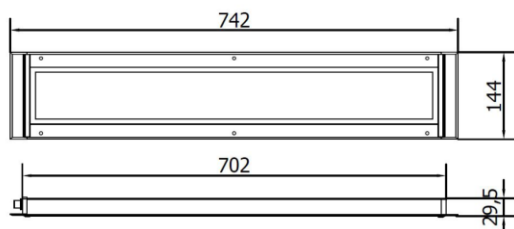

**NOTE:** Installation Height: 1m