
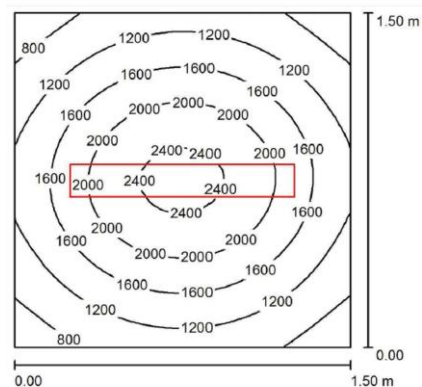



PRODUCT FEATURES

Power usage	93 W
Power supply	24 Vdc
Light source	LED
Electrical connection	M12-A 4P Male
Color temperature	6500 K, CRI 80
Luminous flux	8300 lm
Efficiency	89 lm/W
Light beam angle	120°
Housing	Anodized aluminum
Front protection	Tempered glass
Protection index	IP67
Impact resistance	Ref EN60079-0:2012
Operating temperature	-20 °C to + 45 °C (-04 °F to +113 °F)
Weight	4,30 kg (9,48 lb)
Agency approvals	CE, RoHS

Mounting

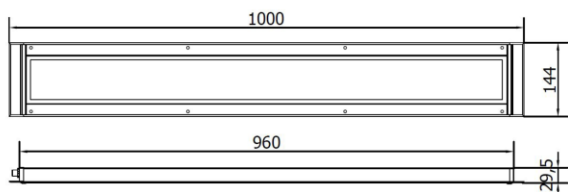

NOTE: Installation Height: 1m