



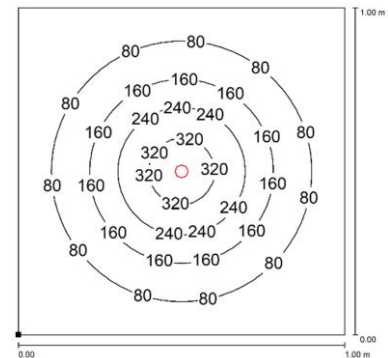

**PRODUCT FEATURES**

|                              |                                   |
|------------------------------|-----------------------------------|
| <b>Power usage</b>           | 3 W                               |
| <b>Power supply</b>          | 100-230 Vac with LED Driver       |
| <b>Light source</b>          | LED                               |
| <b>Electrical connection</b> | Cable 1.5m (5ft), Europlug        |
| <b>Color temperature</b>     | 5000K, CRI 80                     |
| <b>Luminous flux</b>         | 160 lm                            |
| <b>Efficiency</b>            | 53 lm/W                           |
| <b>Light beam angle</b>      | 25°                               |
| <b>Housing</b>               | Anodized aluminum                 |
| <b>Front protection</b>      | Tempered glass                    |
| <b>Protection index</b>      | IP65                              |
| <b>Impact resistance</b>     | IK06                              |
| <b>Operating temperature</b> | -20°C to + 45°C (-04°F to +113°F) |
| <b>Weight</b>                | 1,40 kg (3,09 lb)                 |
| <b>Agency approvals</b>      | CE,<br>RoHS                       |
| <b>Mounting</b>              | CLAMPO4, B02, SCREW               |

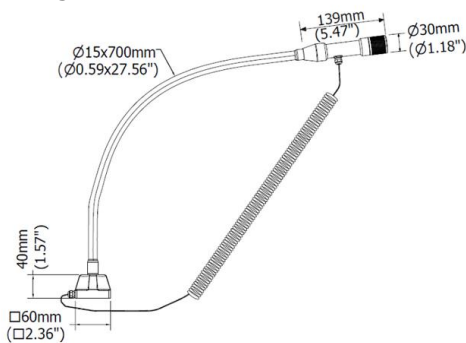

**NOTE:** Installation Height: 1m