




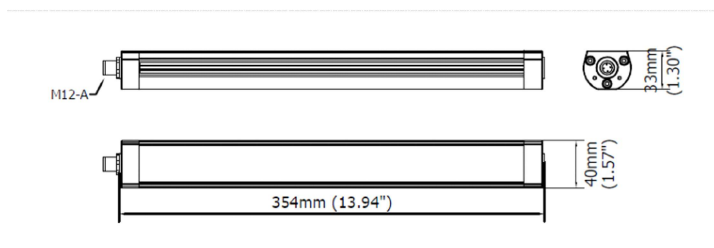
Model: COMPACT-ALPHA CA0221S11 - TECHNICAL FEATURES

| | | |
|--|---|--|
| <p>Agency Approval</p>  | Wattage | 12W |
| | Power supply | 22-40 Vdc |
| | Special features | PWM interface for dimming and flashing |
| | Light source | Mid-Power Energy efficiency Category A/A+/A++ |
| | Life Span | 60 000 h L70 ** |
| | Electrical Service | M12-A 4P Male |
| | Color temperature | 5000 K -CRI 85 |
| | Luminous flux | ~ 1300 lm @ 39" (1 m) high |
| | Efficiency | 108 lumen/W |
| | Light beam angle | 30° |
| | Luminaire Body | Whole Anodized Aluminum |
| | Front Shield | Hardened glass |
| | Protection rates | IP67 |
| | Impact resistance | IK06 |
| | Operating temperature | -20°C to + 45°C (-04°F to +113°F) |
| Weight | 1.30 lb (0.60kg) | |
| Agency approvals | cURus in compliance with UL2108, CSA C22.2, CE, RoHS | |

Mounting CAFX02, Side mounting Brackets B05, Magnet



DIMENSIONS



EFFICIENCY

MEASUREMENT@ 39 Inch (1 meter) high

