



**Model: COMPACT-ALPHA CA0221S13 - TECHNICAL FEATURES**

Agency Approval



RoHS

<b>Wattage</b>	<b>12W</b>
<b>Power supply</b>	22-40 Vdc
<b>Special features</b>	PWM interface for dimming and flashing
<b>Light source</b>	Mid-Power Energy efficiency Category A/A+/A++
<b>Life Span</b>	60 000 h L70 **
<b>Electrical Service</b>	M12-A 4P Male
<b>Color temperature</b>	5000 K -CRI 85
<b>Luminous flux</b>	~ 1100 lm @ 39" (1 m) high
<b>Efficiency</b>	92 lumen/W
<b>Light beam angle</b>	110°
<b>Luminaire Body</b>	Whole Anodized Aluminum
<b>Front Shield</b>	Hardened glass
<b>Protection rates</b>	IP67
<b>Impact resistance</b>	IK06
<b>Operating temperature</b>	-20°C to + 45°C (-04°F to +113°F)
<b>Weight</b>	1.30 lb (0.60kg)
<b>Agency approvals</b>	cURus in compliance with UL2108, CSA C22.2, CE, RoHS


**Mounting**

CAFX02, Side mounting Brackets

B05, Magnet



**DIMENSIONS**

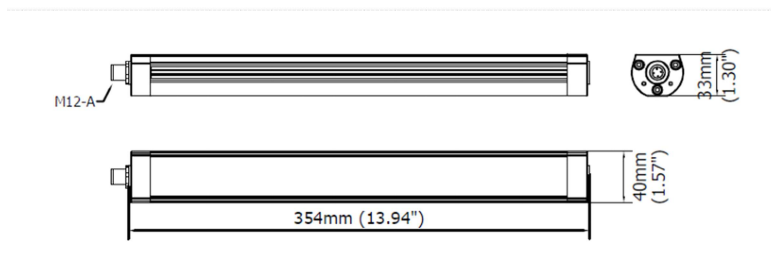

**EFFICIENCY**

MEASUREMENT@ 39 Inch (1 meter) high

