



# CA0321S04

## COMPACT ALPHA



### PRODUCT FEATURES

<b>Power usage</b>	18 W
<b>Power supply</b>	24 Vdc
<b>Light source</b>	LED
<b>Electrical connection</b>	Cable 3 m (10 ft)
<b>Color temperature</b>	5000K, CRI 80
<b>Luminous flux</b>	1950 lm
<b>Efficiency</b>	108 lm/W
<b>Light beam angle</b>	30°
<b>Housing</b>	Anodized aluminum
<b>Front protection</b>	Tempered glass
<b>Protection index</b>	IP67 (compatible with NEMA TYPE 12)
<b>Impact resistance</b>	IK06
<b>Operating temperature</b>	-20°C to + 45°C (-04°F to +113°F)
<b>Weight</b>	1,00 kg (2,20 lb)
<b>Agency approvals</b>	cURus in compliance with UL2108, CSA C22.2, CE, RoHs
<b>Mounting</b>	CAFX01, B05

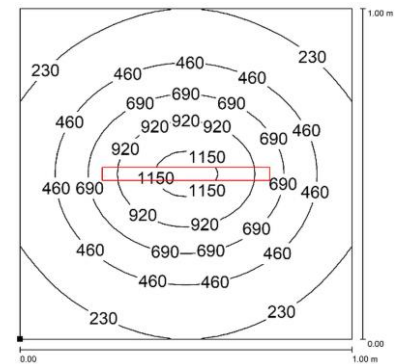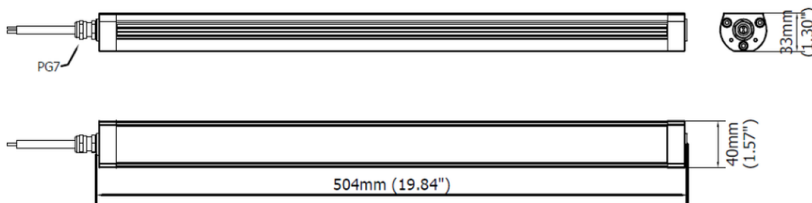

**NOTE:** Installation Height: 1m