






Model: COMPACT-ALPHA CA0321S11 - TECHNICAL FEATURES

<p>Agency Approval</p>  	Wattage	18W
	Power supply	22-40 Vdc
	Special features	PWM interface for dimming and flashing
	Light source	Mid-Power Energy Efficiency Category A/A+/A++
	Life Span	60 000 h L70 **
	Electrical Service	M12-A 4P Male
	Color temperature	5000 K -CRI 85
	Luminous flux	~ 1950 lm @ 39" (1 m) high
	Efficiency	108 lumen/W
	Light beam angle	30°
	Luminaire Body	Whole Anodized Aluminum
	Front Shield	Hardened glass
	Protection rates	IP67
	Impact resistance	IK06
Operating temperature	-20°C to + 45°C (-04°F to +113°F)	
Weight	1.85 lb (0.85kg)	
Agency approvals	cURus in compliance with UL2108, CSA C22.2, CE, RoHS	

Mounting CAFX02, Side mounting Brackets B05, Magnet



DIMENSIONS

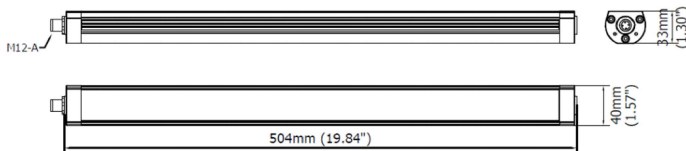

EFFICIENCY

MEASUREMENT@ 39 Inch (1 meter) high

