CA0321S13 PWM -M12 Surface Mount

COMPACT-ALPHA IP67





## Model: COMPACT-ALPHA CA0321S13 - TECHNICAL FEATURES

Agency Approval

c **FL** us

**RoHS** 

Wattage 18W

Power supply 22-40 Vdc

Special features PWM interface for dimming and flashing

Light source Mid-Power Energy efficiency Category A/A+/A++

Life Span 60 000 h L70 \*\*
Electrical Service M12-A 4P Male
Color temperature 5000 K - CRI 85

**Luminous flux** ~ 1650 lm @ 39" (1 m) high

Efficiency 92 lumen/W

Light beam angle 110°

Luminaire Body Whole Anodized Aluminum

Front Shield Hardened glass

Protection rates IP67
Impact resistance IK06

Operating temperature -20°C to + 45°C (-04°F to +113°F)

Weight 1.85 lb (0.85kg)


Agency approvals cURus in compliance with UL2108, CSA C22.2, CE, RoHS

Mounting CAFX02, Side mounting Brackets B05, Magnet






## **DIMENSIONS**

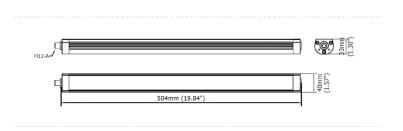

## **EFFICIENCY**

MEASUREMENT@ 39 Inch (1 meter) high



North America Europe www.ccealights-usa.com www.ccealights.com