



Model: COMPACT-ALPHA CA0421S11 - TECHNICAL FEATURES

Agency
Approval



RoHS

Wattage	24W
Power supply	22-40 Vdc
Special features	PWM interface for dimming and flashing
Light source	Mid-Power Energy efficiency Category A/A+/A++
Life Span	60 000 h L70 **
Electrical Service	M12-A 4P Male
Color temperature	5000 K -CRI 85
Luminous flux	~ 2600 lm @ 39" (1 m) high
Efficiency	108 lumen/W
Light beam angle	30°
Luminaire Body	Whole Anodized Aluminum
Front Shield	Hardened glass
Protection rates	IP67
Impact resistance	IK06
Operating temperature	-20°C to + 45°C (-04°F to +113°F)
Weight	2.38 lb (1.10kg)
Agency approvals	cURus in compliance with UL2108, CSA C22.2, CE, RoHS


Mounting

CAFX02, Side mounting Brackets

B05, Magnet



DIMENSIONS

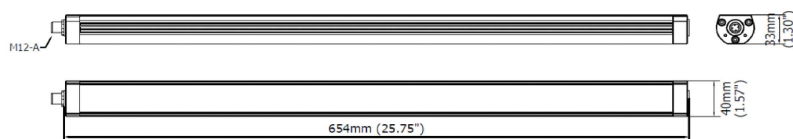

EFFICIENCY

MEASUREMENT@ 39 Inch (1 meter) high

