



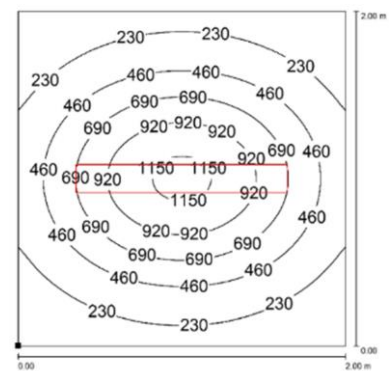

PRODUCT FEATURES

Power usage	48 W
Power supply	24 Vdc
Light source	LED
Electrical connection	Cable 3m (10ft)
Color temperature	5000K, CRI 80
Luminous flux	4800 lm
Efficiency	100 lm/W
Light beam angle	120°
Housing	Anodized aluminum
Front protection	PMMA Prismatic
Protection index	IP40
Impact resistance	IK06
Operating temperature	-20°C to + 45°C (-04°F to +113°F)
Weight	4,25 kg (9,37 lb)
Agency approvals	CE, RoHS
Mounting	MZFX01, MZFX02

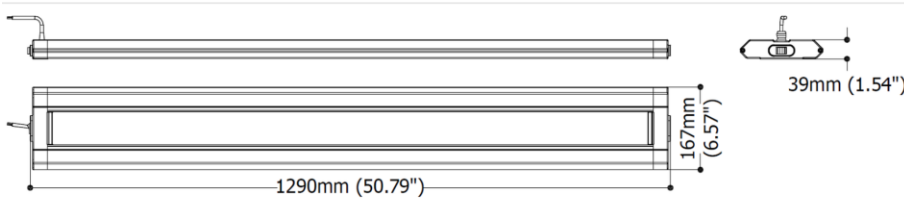

NOTE: Installation Height: 1m