Datasheet

RT0322S03

L1050

PRODUCT FEATURES

Power usage	3 W
Power supply	230 Vac
Light source	LED
Electrical connection	Cable 2m(6.5ft) Europlug
Color temperature	5000K, CRI 80
Luminous flux	310 lm
Efficiency	103 lm/W
Light beam angle	25°
Housing	Anodized aluminum
Front protection	PMMA Lens
Protection index	IP40
Impact resistance	-
Operating temperature	-20°C to + 45°C (-04°F to +113°F)
Weight	0,90 kg (1,92 lb)
Agency approvals	CE, RoHS
Mounting	Adjustable joint with M8 screw

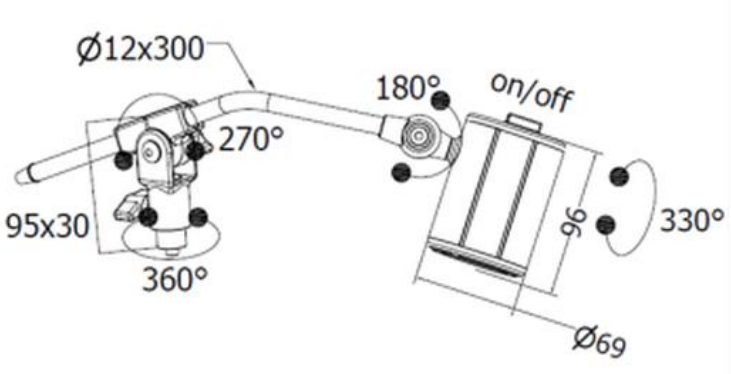

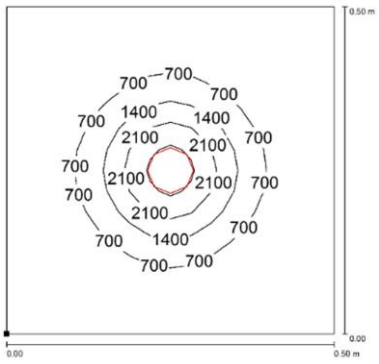

All the information gathered by this manual can be modified at any time without prior notice and do not imply any obligation by CCEA

North America **www.ccealights-usa.com**
Europe **www.ccealights.com**

NOTE: Installation Height: 0,5m