

# SR0126S02

## SIRIO P 1 LED Panel Mount – 40°, Optik




PSU A32

### Model P1.40.24.C3 - PRODUCT FEATURES

Power usage	3 W @ 700 mA
Power supply	24 Vdc 700 mA with PSU A32
Light source	1 HIGH POWER LED
Electrical connection	Cable 10 Ft (3 m)
Color temperature	5000K, CRI 80
illuminance	1300 lux @ 20" (500 mm) Height
Efficiency	180 lumen → 60 lm/W
Light beam angle	40° Optics
Housing	Anodized aluminum
Front protection	Hardened glass
Protection index	IP68 - IP69
Impact resistance	IK06
Operating temperature	-20°C to + 45°C (-04°F to +113°F)
Weight	0,35 kg (0,77 lb)
Agency approvals	CE, RoHS
Mounting	Threaded ring

### DIMENSIONS

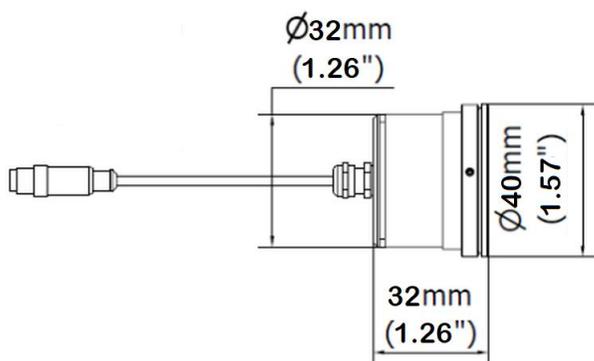

### ILLUMINANCE

