

SR0321S01


SIRIO P, 3 LED, Panel Mount, 40° Optik




Model P3.40.24.C3 - PRODUCT FEATURES

Power usage	6 W @ 500 mA
Power supply	22-26 Vdc built-in Drivers
Light source	3 High-power LED
Electrical connection	Cable 3m (10ft) with M12-A 3P Male
Color temperature	5000K, CRI 80
Illuminance	1050 lux @ 40 in, (1000 mm) Height 400 lm
Efficiency	390 lumen → 130 lm/W
Light beam angle	40° Optik
Housing	Anodized aluminum
Front protection	Tempered glass
Protection index	IP68 - IP69
Impact resistance	IK06
Operating temperature	-20°C to + 45°C (-04°F to +113°F)
Weight	0,45 kg (0,95 lb)
Agency approvals	CE, RoHS
Mounting	Threaded ring

DIMENSIONS

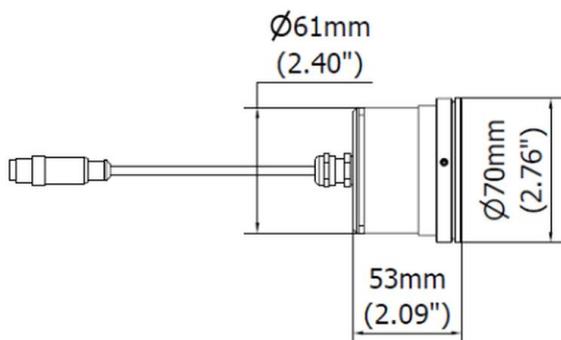

ILLUMINANCE

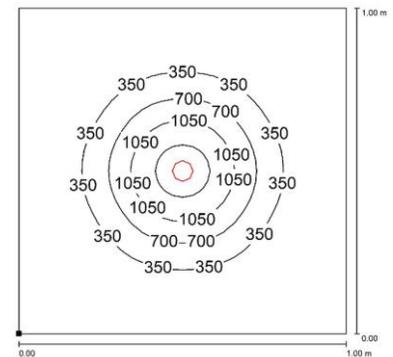

Measurement at 40 in, (1000 mm) Height