

SR0621S01


SIRIO P, 6 LED, 40°, Optik




Model P6.40.24.C3 - PRODUCT FEATURES

| | |
|-----------------------|--|
| Power usage | 12 W @ 500 mA |
| Power supply | 22 - 26 Vdc Built-in Drivers |
| Light source | High Power LED |
| Electrical connection | Cable 3m (10ft) with M12-A 3P Male |
| Color temperature | 5000K, CRI 80 |
| Luminous flux | 1200 Lux @ 40 in (1000 mm) Height 630 lm |
| Efficiency | 630 lumen → 105 lm/W |
| Light beam angle | 40° Optik |
| Housing | Anodized aluminum |
| Front protection | Tempered glass |
| Protection index | IP68 - IP69 |
| Impact resistance | IK06 |
| Operating temperature | -20°C to + 45°C (-04°F to +113°F) |
| Weight | 0,45 kg (0,95 lb) |
| Agency approvals | CE, RoHS |
| Mounting | Threaded ring |

DIMENSIONS

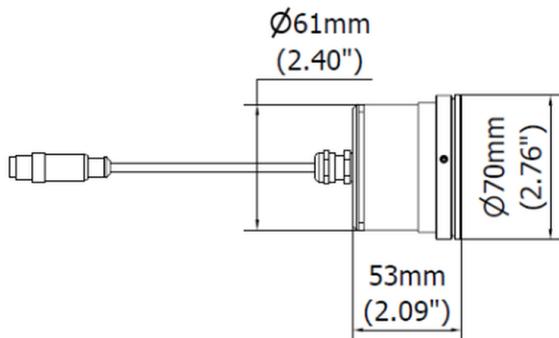

ILLUMINANCE

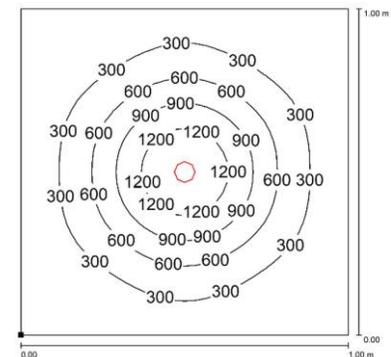

Measurement @ 40 in (1000 mm) Height