



# SR0921Q0601

## SIRIO Q



### PRODUCT FEATURES

<b>Power usage</b>	16 W
<b>Power supply</b>	12-24 Vdc
<b>Light source</b>	LED
<b>Electrical connection</b>	Cable 3 m (10 ft)
<b>Color temperature</b>	5000 K, CRI 80
<b>Luminous flux</b>	1450 lm
<b>Efficiency</b>	90 lm/W
<b>Light beam angle</b>	60°
<b>Housing</b>	Anodized aluminum
<b>Front protection</b>	Tempered glass
<b>Protection index</b>	IP67 - IP69 (compatible with NEMA TYPE 12)
<b>Impact resistance</b>	IK06
<b>Operating temperature</b>	-20 °C to + 45 °C (-04 °F to +113 °F)
<b>Weight</b>	0,75 kg (1,64 lb)
<b>Agency approvals</b>	cURus in compliance with UL2108, CSA C22.2, CE, RoHs
<b>Mounting</b>	SRQFX01(included)

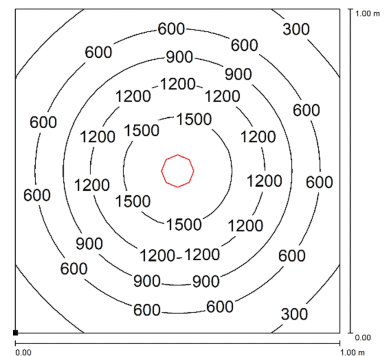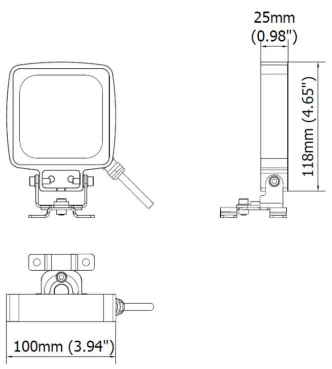

**NOTE:** Installation Height: 1m