


# TA0721S03W

## TRACKALPHA PRO



### PRODUCT FEATURES

|                              |  |
|------------------------------|--|
| <b>Power usage</b>           | 45,5 W   |
| <b>Power supply</b>          | 24 Vdc   |
| <b>Light source</b>          | LED  |
| <b>Electrical connection</b> | Cable 3 m (10 ft)                                    |
| <b>Color temperature</b>     | 5000 K, CRI 80                                       |
| <b>Luminous flux</b>         | 5280 lm  |
| <b>Efficiency</b>            | 116,00 lm/W  |
| <b>Light beam angle</b>      | 120°   |
| <b>Housing</b>               | Anodized aluminum                                    |
| <b>Front protection</b>      | Tempered satin glass                                 |
| <b>Protection index</b>      | IP67 (compatible with NEMA TYPE 12)                  |
| <b>Impact resistance</b>     | IK06   |
| <b>Operating temperature</b> | -20 °C to + 45 °C (-04 °F to +113 °F)                |
| <b>Weight</b>                | 3,50 kg (7,72 lb)                                    |
| <b>Agency approvals</b>      | cURus in compliance with UL2108, CSA C22.2, CE, RoHS |
| <b>Mounting</b>              | TAFX02, TACLIP, B03                                  |

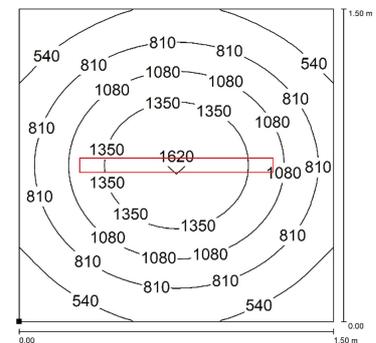

**NOTE:** Installation Height: 1m