
Datasheet **TA1021S03W** TRACKALPHA PRO




PRODUCT FEATURES	
Power usage	65 W
Power supply	24 Vdc
Light source	LED
Electrical connection	Cable 3 m (10 ft)
Color temperature	5000 K, CRI 80
Luminous flux	7550 lm
Efficiency	116,00 lm/W
Light beam angle	120°
Housing	Anodized aluminum
Front protection	Tempered satin glass
Protection index	IP67 (compatible with NEMA TYPE 12)
Impact resistance	IK06
Operating temperature	-20 °C to + 45 °C (-04 °F to +113 °F)
Weight	4,85 kg (10,69 lb)
Agency approvals	cURus in compliance with UL2108, CSA C22.2, CE, RoHs
Mounting	TAFX02, TACLIP, B03

(Ģ

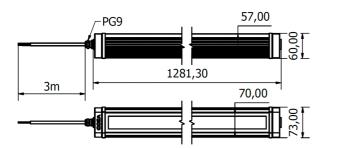

All the information gathered by this manual can be modified at any time without prior notice and do not imply any obligation by CCEA TA1021S03W _EN.docx 07/07/2021



NOTE: Installation Height: 1m

North Americawww.ccealights-usa.comEuropewww.ccealights.com